

Part No:

HWCA-90NF-RA



Waveguide to Coax Adapter WR-90 to Type N Female Right Angle - 8.2 to 12.4 GHz



The HASCO HWCA-90NF-RA is a WR-90 Waveguide to Type N Female Right Angle Adapter offering a VSWR of 1.25:1.

Our waveguides come in standard WR designs and operate across the full waveguide band from 18 GHz to 325 GHz.

Electrical

• Frequency Range	8.2 - 12.4 GHz
• VSWR	125:1 Max
• Waveguide	WR-90
• Flange	UG135/U


Mechanical

• Length	1.28 inch REF
• Width	1.22 inch REF
• Height	1 inch

Material

• Material	6061-T6 Aluminum Alloy
• Finish	Clear Chemical Film PER MIL-C-5541

Waveguide to Coax Adapter WR-90 to Type N Female Right Angle | 8.2 - 12.4 GHz | Outline Drawing

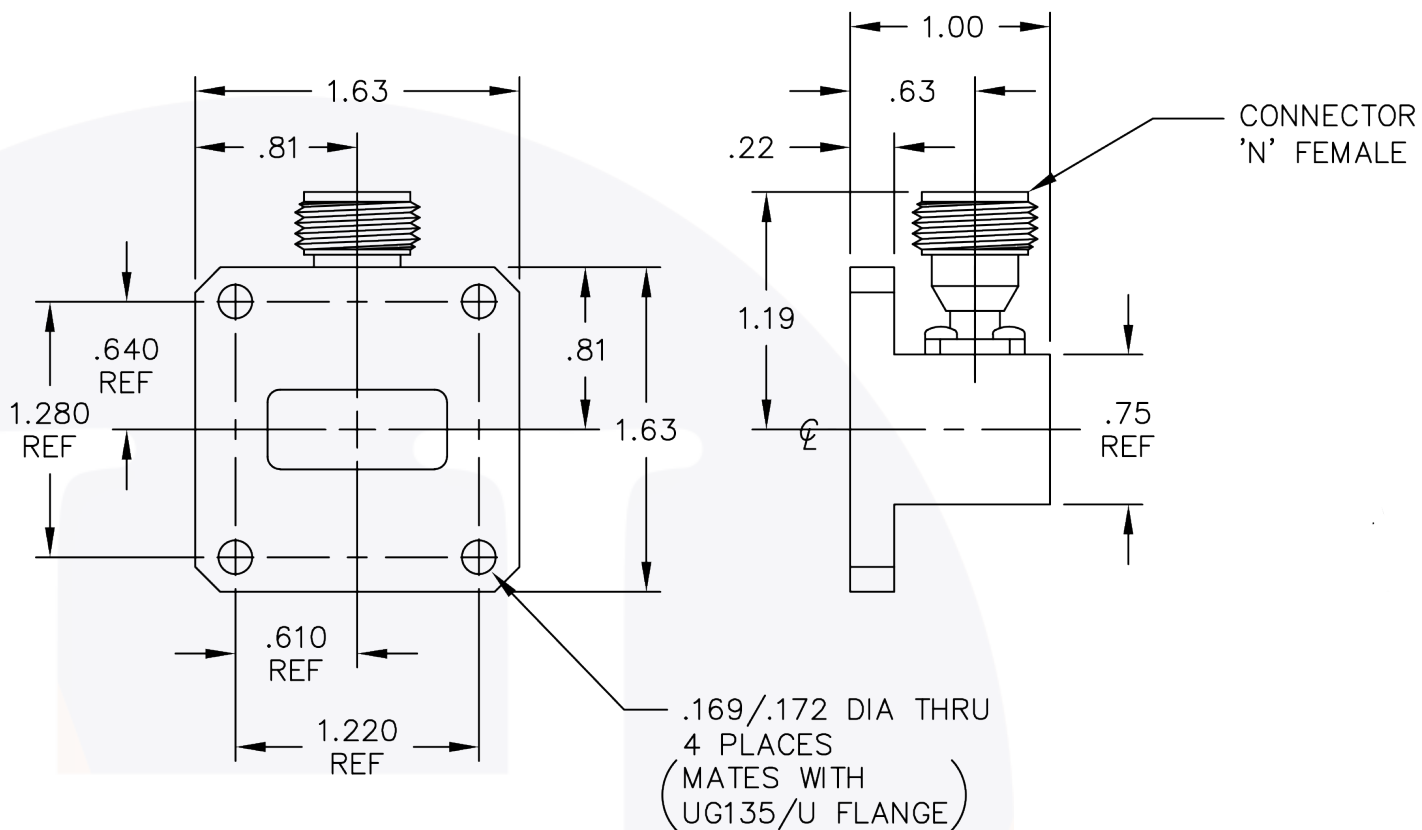

LTR	DESCRIPTION	DATE	APPR.	DRAWN BY: NS	REVIEWED BY: JS
-	RELEASE	5/21	TC		APPROVED BY: TC
A	TEMPLATE UPDATE	3/25	TC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HASCO COMPONENTS AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS THE BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS, WRITTEN PERMISSION OF HASCO COMPONENTS.	
THIS DRAWING IS A CONTROLLED DOCUMENT					



5214 Bonsai Avenue • Moorpark, CA 93021
 (888) 498-3242 • sales@hasco-inc.com
www.hasco-inc.com

MATERIALS:
SEE DATA SHEET

CAGE CODE:
0T8L4

SCALE:
N/A

SIZE:
A

FINISHES:
SEE DATA SHEET

PART NO./DRAWING NO.

HWCA-90NF-RA

REV:
A