HAD-185P24P





Features

- RoHs Compliant
- Thermal Shock: MIL-STD-202, Method 107, Cond. B
- Moisture Resistance: MIL-STD-202, Method 206
- Corrosion: MIL-STD-202, Method 101, Cond. B
- Interface: MIL-STD-348B (2.4mm), IEEE287; IEC61169-32 (1.85mm)

HAD-185P24P is a 1.85mm Male to 2.4mm Male between series adapter manufactured by HASCO Components. This between series 1.85mm to 2.4mm coax adapter will operate up to 50 GHz and offers a VSWR of 1.15:1. Adapters that have a male to female or plug to jack configuration are known as "connector savers." Typically, a low loss or low VSWR male to female adapter is placed on more expensive component connectors to prevent damage.

1.85mm Male to 2.4mm Male Adapter - 50 GHz

Electrical

• Impedence 50 Ω

Frequency Range DC - 50 GHzVSWR 1.15:1 Max

• Insertion Loss $\leq 0.05 \text{ x f(GHz) dB}$

Insulation Resistance ≥5000MΩ

Diel. Withstanding Voltage
Working Voltage
RF Leakage
500 V rms (sea level)
150 V rms (sea level)
≥ 100 dB to 1 GHz

Mechanical

• Coupling Nut Torque 7.08 to 9.74 in/lbs

• Coupling Proof Torque 15 in/lbs • Contact Captivation Axial \geq 4.5 lbs • Durability \geq 500

Environmental

• Temperature Range -40°C to 165°C


Material

Connector Body & Nut
Passivated Stainless Steel

• Center Contact Gold Plated BeCu

• Dielectric PEI

• Gasket Silicone

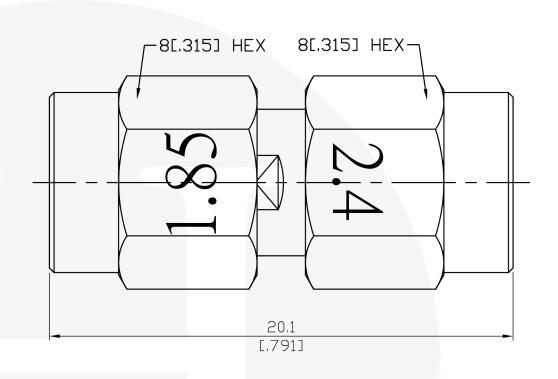

LTR	DESCRIPTION	DATE	APPR.	drawn by: NS	REVIEWED BY: JS		ACCO 5	5214 Bonsai Avenue •	Moorpark, CA 93021
-	RELEASE	3/25	TC		APPROVED BY: TC		43CO (888) 498-3242 • sales@	
					SPECIFICATIONS ARE THE	COMPONENTS		www.hasco-inc.com	
				NOT BE REPRODUCED, WHOLE OR IN PART - AS	COPIED NOR USED - IN THE BASIS FOR THE MAN- OTHER ITEMS WITHOUT PERMISSION OF HASCO	MATERIALS:	CAGE CODE:	SCALE:	SIZE:
						SEE DATA SHEET	0T8L4	N/A	А
				/			PART NO./DRAWING NO.		REV:
				COMPONENTS.		FINISHES:			_
					SEE DATA SHEET	HAD-184P24P			
THIS DRAWING IS A CONTROLLED DOCUMENT									

Product specifications subject to change without notification.